

thermo
Sphere

HEATING | WALL | TOWEL BAR



Stock Code	Profile	Size (mm)	Finish	Voltage (V)	Output (W)
HTB-SR-400	Straight Round	400 x 32 x 100	Polished	12	17
HTB-SR-600	Straight Round	600 x 32 x 100	Polished	12	18

Electric heated towel rails safe for use in wet locations



12V Dry electrical element



5 Year Guarantee



304 Quality stainless steel

Running temperatures

Our unique self regulating heating element ensures that these rails only reach full operating temperature when the towel is applied. The optimum temperature is maintained with a fraction of the energy used by a standard fixed output rail.

Max temp no towel: 30-35°C.
Max temp with towel: 40-45°C.

Care instructions

Clean with warm soapy water followed by rinsing with clean water and drying with a soft cloth. All finishes are vulnerable to acid attack and some strong substances such as household cleaners or disinfectants can cause surfaces to go black or peel.

What's in the box?

- 1x Heated towel bar
- 1x Fixing spigot
- 1x Stainless steel dress ring
- 4x Fixing screws and plugs
- 1x Allen key
- 1x 3m cold tail

What else do I need?

Multiple towel bars must be wired in parallel. Connect to a 12V transformer suitably rated for the combined output of all towel bars.

Use the Mounting System for easy installation of multiple towel bars. Separate data sheet available.

Custom finishes to match your brassware

ThermoSphere towel bars are available in a wide range of custom finishes. Supply us with a sample and we can match the finish. Some of our popular finishes include:

Polished Stainless Steel



Matt Black



Brushed Brass



Brushed Stainless Steel



Champagne Gold



Antique bronze



Included with each towel bar:



TBS-S600 Fixing spigot




Stainless steel dress ring
Ø42 x 2mm

For retrofit you will also need:



RDR-R-01 Retrofit dress ring (Sold separately)
Ø70 x 5mm

Towel bar mounting system

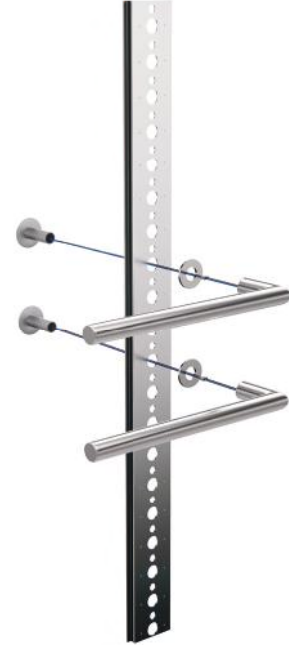

Easy pre-spaced multiple rail installation and cable management for ThermoSphere towel bars. A fixing spigot is included with all single ended models which can be used for installation with a towel bar mounting system.

Mounting system sold separately